




# Media Processing Solutions

Cross Folder

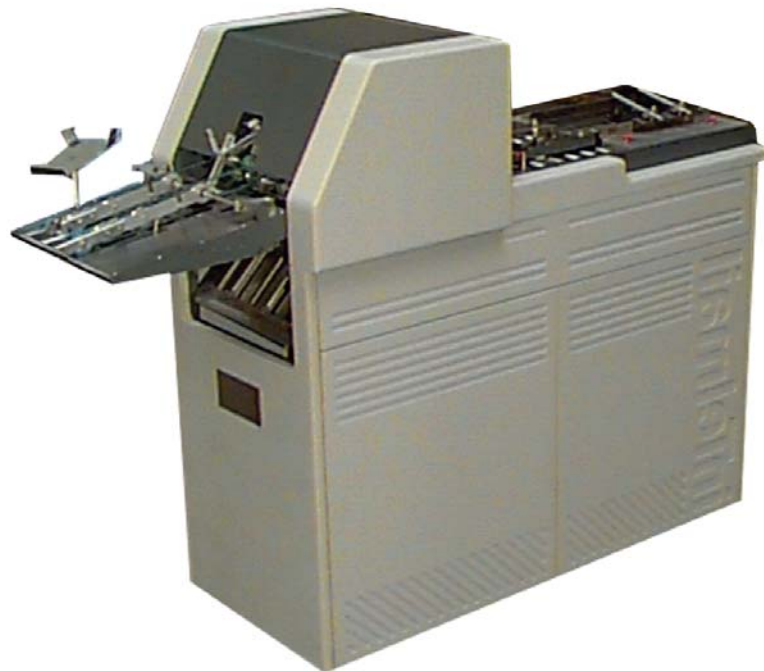


**im connect**

**XF Cross Folder**

# XF Cross Folder

The Model XF Folder is designed to work inline with a suitably prepared inserting machine and in Telmail sheet feeder mounted at right angles.

It can be used to reduce the size of a large document down to suit the carrier envelope size, both in width and depth. Typically it will accept a vertically folded document from a Model VAF feeder/folder, then fold this horizontally before feeding it into the inserting machine.

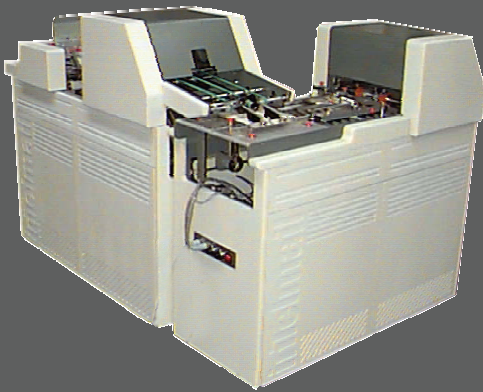

XF with VAF Input Channel

## Typical applications

- Use with inserter and Model VAF feeder/folder to feed and fold A3 size forms down to fit into DL size envelopes
- Use one or two inline at the output end of a printer or burster etc to fold forms as they exit the machine
- Use as a stand alone folder with any IM Connect feeder and conveyor

**true connectivity** of IM Connect **intelligent mailing system modules** provides solutions for any mail processing requirement.

IM Connect's range of mailing equipment, whether used as **stand-alone** units or integrated into **complete intelligent systems**, can greatly expand your mail processing capabilities.

## Product Information

### Standard Machine Features

- Adjustable height
- Two plate folder
- Automatic adjustment for thickness
- Unique right angle push turn
- Cross fold single or multiple sheet sets
- Unique easy change from left to right takeaway

### Standard Software/Hardware Features

- Built in control unit
- Operating and Timing Software

### Optional Hardware Features

- Four fold plates
- Crease, perforate or slit options
- Output conveyor for off-line use
- Model EF sheet feeder
- Dual purpose interface to any feeder
- Use at right angle or in tandem

## Technical Specifications

<b>Feed Rate</b>	30,000+ A4 (8 1/2 x 11 ") sheets p.h.
<b>Form Sizes - min.</b>	145 x 180 mm (5 5/8 x 7 ")
<b>Form Sizes - max.</b>	300 x 420 mm (11 5/8 x 16 1/2 ")
<b>Paper Weights</b>	60 - 200 gsm (16 - 55lb)
<b>Fold Unit – Types of fold</b>	Half fold, Letter fold, Z-fold
<b>Letter folded sets</b>	up to 4 pages
<b>Half folded sets</b>	up to 6 pages
<b>Power Requirements</b>	220-250 volts, 50 - 60 Hz single phase
<b>Power Consumption - max.</b>	0.30 Kw
<b>Heat Emission - max.</b>	200 J/S
<b>Sound Level</b>	80 dB
<b>Dimensions</b>	L - 1,450 x W - 510 x H - 1,150 mm
<b>Weight</b>	145 Kg

Visit our website or contact us directly

### IM Connect Pty. Ltd.

16/B Mars Road  
Lane Cove, NSW 2066  
Tel +61 2 9427 6700  
Fax +61 2 9418 7798

[www.imconnect.com.au](http://www.imconnect.com.au)  
[systems@imconnect.com.au](mailto:systems@imconnect.com.au)

Patented

PL.XF.v1.2002